



MEE5114 Advanced Control for Robotics

Lecture 4: Exponential Coordinate of Rigid Body Configuration

Prof. Wei Zhang

SUSTech Institute of Robotics
Department of Mechanical and Energy Engineering
Southern University of Science and Technology, Shenzhen, China

Outline


- Exponential Coordinate of $SO(3)$  *rotation matrix*
- Euler Angles and Euler-Like Parameterizations
- Exponential Coordinate of $SE(3)$  *hom transformation matrix*

Outline

- Exponential Coordinate of $SO(3)$
- Euler Angles and Euler-Like Parameterizations
- Exponential Coordinate of $SE(3)$

Towards Exponential Coordinate of $SO(3)$

- Recall the polar coordinate system of the complex plane:
 - Every complex number $z = x + jy = \rho e^{j\phi}$
 - Cartesian coordinate $(x, y) \leftrightarrow$ polar coordinate (ρ, ϕ)
 - For some applications, polar coordinate is preferred due to its geometric meaning.

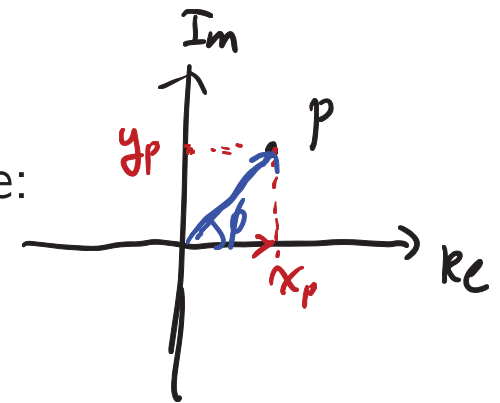

$$p = (x_p, y_p)$$

$$p_{\text{polar}} = (\rho, \phi)$$

- Consider a set $M \triangleq \{(t, \sin(2n\pi t)) : t \in (0, 1), n = 1, 2, 3, \dots\}$


$$M \subseteq \mathbb{R}^2$$

• coord of p : (x_p, y_p)

• take advantage of structure of M :

$$\text{coord of } p: \boxed{(2, x_p)} \leftarrow \sin(2n\pi t), n=2, t=x_p$$

$$p_2: (1, x_{p_2}) \leftarrow$$

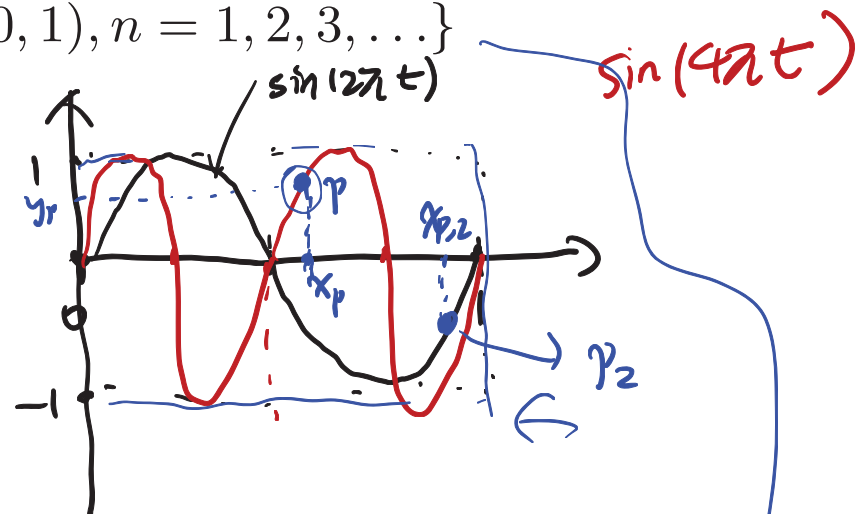

Exponential Coordinate of $SO(3)$

- **Proposition** [Exponential Coordinate $\leftrightarrow SO(3)$]


- For any unit vector $[\hat{\omega}] \in so(3)$ and any $\theta \in \mathbb{R}$,

$$\|\hat{\omega}\| = 1$$

$$e^{[\hat{\omega}]\theta} \in SO(3)$$

$\in \mathbb{R}^{3 \times 3}$

- For any $R \in SO(3)$, there exists $\hat{\omega} \in \mathbb{R}^3$ with $\|\hat{\omega}\| = 1$ and $\theta \in \mathbb{R}$ such that

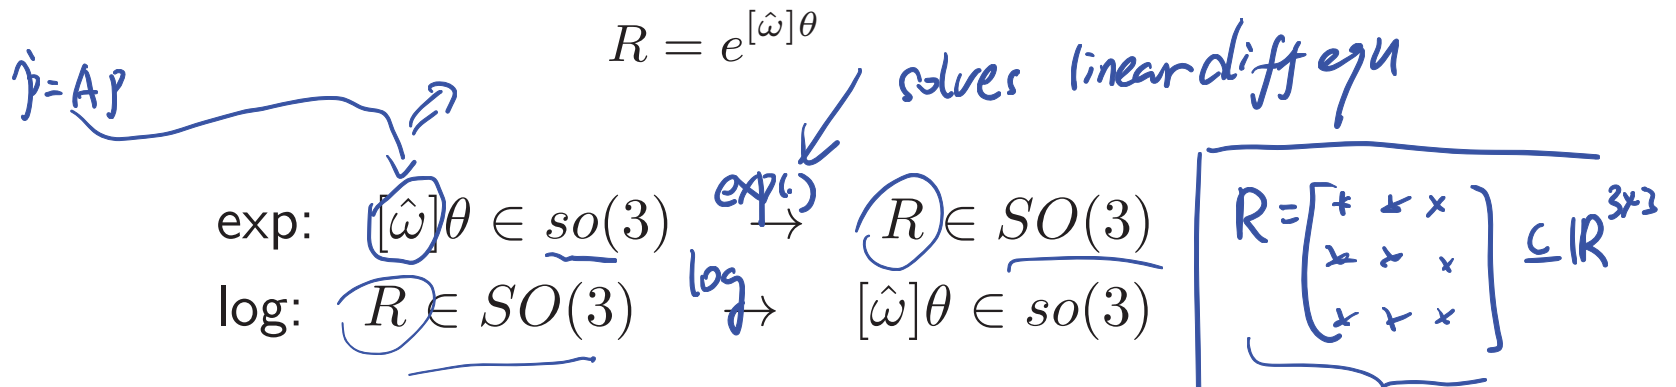

- The vector $\hat{\omega}\theta$ is called the exponential coordinate for R
- The exponential coordinates are also called the canonical coordinates of the rotation group $SO(3)$

Rotation Matrix as Forward Exponential Map

- Exponential Map: By definition

$$R \leftarrow \underbrace{e^{[\omega]\theta}}_{\text{analytical}} \stackrel{\text{analytical}}{=} I + \theta[\omega] + \frac{\theta^2}{2!}[\omega]^2 + \frac{\theta^3}{3!}[\omega]^3 + \dots$$

- Rodrigues' Formula:** Given any unit vector $[\hat{\omega}] \in so(3)$, we have

analytical

$$e^{[\hat{\omega}]\theta} = I + [\hat{\omega}] \sin(\theta) + [\hat{\omega}]^2 (1 - \cos(\theta))$$

Fact: if $\|\hat{\omega}\|=1$, then $[\hat{\omega}] = -[\hat{\omega}]^T$, $[\hat{\omega}]^3 = -[\hat{\omega}]$, $[\hat{\omega}]^4 = [\hat{\omega}]^2$

$$e^{[\hat{\omega}]\theta} = I + \theta[\hat{\omega}] + \frac{\theta^2}{2!}[\hat{\omega}]^2 + \frac{\theta^3}{3!}([\hat{\omega}]^3) + \frac{\theta^4}{4!}(-[\hat{\omega}]) + \dots = -[\hat{\omega}]^2$$

$$= \underbrace{\left(I + \left(\theta - \frac{\theta^3}{3!} + \frac{\theta^5}{5!} + \dots \right) [\hat{\omega}] + \left(\frac{\theta^2}{2!} - \frac{\theta^4}{4!} + \frac{\theta^6}{6!} + \dots \right) [\hat{\omega}]^2 \right)}_{\substack{\sin(\theta) \\ 1 - \cos \theta}}$$

Examples of Forward Exponential Map

- Rotation matrix $R_x(\theta)$ (corresponding to $\hat{x}\theta$)

$$\hookrightarrow R_x(\theta) \cong \text{Rot}(x; \theta) = e^{[\hat{x}]\theta} = I + \sin\theta \cdot \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & -1 \\ 0 & 1 & 0 \end{bmatrix} + (1 - \cos\theta) \begin{bmatrix} 0 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$\hat{\omega} = \hat{x} = \begin{bmatrix} 1 \\ 0 \\ 0 \end{bmatrix} \Rightarrow [\hat{x}] = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & -1 \\ 0 & 1 & 0 \end{bmatrix}$$

$$= \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\theta & -\sin\theta \\ 0 & \sin\theta & \cos\theta \end{bmatrix} \cdot \begin{bmatrix} 0 & 0 & 0 \\ 0 & -1 & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

- Rotation matrix corresponding to $(1, 0, 1)^T$

exp coordinate

$$\hat{\omega} = \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix} \cdot \frac{1}{\sqrt{2}}, \quad \theta = \sqrt{2}$$

$$\begin{pmatrix} 0 \\ 1 \\ 0 \end{pmatrix} \longrightarrow R = e^{[\hat{\omega}]\theta} =$$

Logarithm of Rotations

- If $\underline{R = I}$, then $\theta = 0$ and $\hat{\omega}$ is undefined.

- If $\underline{\text{tr}(R) = -1}$, then $\theta = \pi$ and set $\hat{\omega}$ equal to one of the following


$$\frac{1}{\sqrt{2(1+r_{33})}} \begin{bmatrix} r_{13} \\ r_{23} \\ 1+r_{33} \end{bmatrix}, \frac{1}{\sqrt{2(1+r_{22})}} \begin{bmatrix} r_{12} \\ 1+r_{22} \\ r_{32} \end{bmatrix}, \frac{1}{\sqrt{2(1+r_{11})}} \begin{bmatrix} 1+r_{11} \\ r_{21} \\ r_{31} \end{bmatrix}$$

- Otherwise, $\underline{\theta = \cos^{-1} \left(\frac{1}{2}(\text{tr}(R) - 1) \right) \in [0, \pi)}$ and $\underline{[\hat{\omega}] = \frac{1}{2 \sin(\theta)} (R - R^T)}$

Outline

- Exponential Coordinate of $SO(3)$
- Euler Angles and Euler-Like Parameterizations
- Exponential Coordinate of $SE(3)$

Euler Angle Representation of Rotation

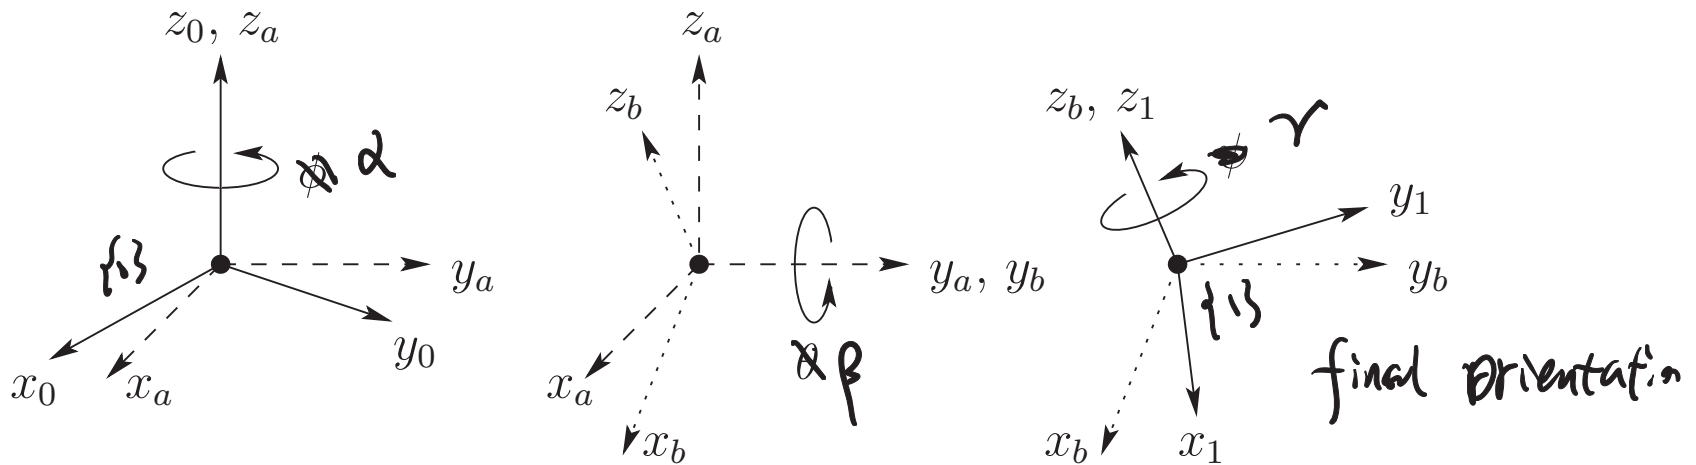


- A common method of specifying a rotation matrix is through three independent quantities called Euler Angles.
- Euler angle representation
 - Initially, frame $\{0\}$ coincides with frame $\{1\}$
 - Rotate $\{1\}$ about \hat{z}_0 by an angle α , then rotate about \hat{y}_a axis by β , and then rotate about the \hat{z}_b axis by γ . This yields a net orientation ${}^0R_1(\alpha, \beta, \gamma)$ parameterized by the ZYZ angles (α, β, γ)

$${}^0R_1(\alpha, \beta, \gamma) = R_z(\alpha)R_y(\beta)R_z(\gamma) \rightarrow R_z(\gamma) = e^{[\hat{z}]\gamma}$$

$\rightarrow \text{Rot}(z, \alpha) \rightarrow \text{Rot}(z, \gamma)$

Other Euler-Like Parameterizations

- Other types of Euler angle parameterization can be devised using different ordered sets of rotation axes
- Common choices include:
 - ZYX Euler angles: also called *Fick angles* or yaw, pitch and roll angles
 - YZX Euler angles (Helmholtz angles)

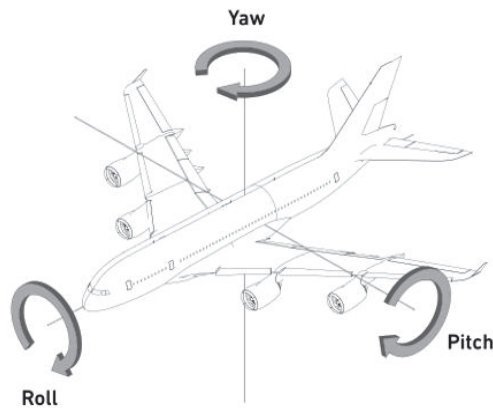

Outline

- Exponential Coordinate of $SO(3)$
- Euler Angles and Euler-Like Parameterizations
- Exponential Coordinate of $SE(3)$

Exponential Map of $\underline{se(3)}$: From Twist to Rigid Motion

Theorem 1 [Exponential Map of $se(3)$]: For any $\mathcal{V} = (\omega, v)$ and $\theta \in \mathbb{R}$, we have $e^{[\mathcal{V}]\theta} \in SE(3)$ *Homogeneous transformation matrix*

• Case 1 ($\omega = 0$): $e^{[\mathcal{V}]\theta} = \begin{bmatrix} I & v\theta \\ 0 & 1 \end{bmatrix}$

• Case 2 ($\omega \neq 0$): without loss of generality assume $\|\omega\| = 1$. Then

$$e^{[\mathcal{V}]\theta} = \begin{bmatrix} e^{[\omega]\theta} & G(\theta)v \\ 0 & 1 \end{bmatrix}, \text{ with } G(\theta) = I\theta + (1 - \cos(\theta))[\omega] + (\theta - \sin(\theta))[\omega]^2 \quad (1)$$

$$\mathcal{V} \in \mathbb{R}^6 = \begin{bmatrix} \omega \\ v \end{bmatrix}, \quad [\mathcal{V}] = \begin{bmatrix} \overset{3 \times 3}{[\omega]} & \overset{3 \times 1}{v} \\ 0 & 1 \end{bmatrix} \in \mathbb{R}^{4 \times 6} \quad \longrightarrow \quad \underbrace{e^{[\mathcal{V}]\theta}}_{4 \times 4} \in SE(3)$$

Forward exp map from $se(3)$ \longrightarrow $SE(3)$

Log of $SE(3)$: from Rigid-Body Motion to Twist


Theorem 2 [Log of $SE(3)$]: Given any $T = (R, p) \in SE(3)$, one can always find twist $\mathcal{S} = (\omega, v)$ and a scalar θ such that

$$e^{\mathcal{S}\theta} = \left(T \right) = \begin{bmatrix} R & p \\ 0 & 1 \end{bmatrix}$$

Matrix Logarithm Algorithm:

- If $R = I$, then set $\omega = 0$, $v = p/\|p\|$, and $\theta = \|p\|$.
- Otherwise, use matrix logarithm on $SO(3)$ to determine ω and θ from R . Then v is calculated as $v = G^{-1}(\theta)p$, where

$$G^{-1}(\theta) = \frac{1}{\theta}I - \frac{1}{2}[\omega] + \left(\frac{1}{\theta} - \frac{1}{2} \cos \frac{\theta}{2} \right) [\omega]^2$$

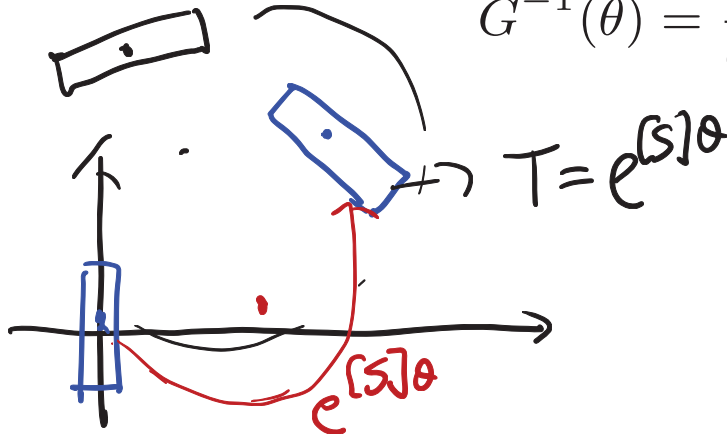

Exponential Coordinates of Rigid Transformation

$$= (\tilde{S}, \theta, h)$$

- To sum up, screw axis $\mathcal{S} = (\omega, v)$ can be expressed as a normalized twist; its matrix representation is

$$[\mathcal{S}] = \begin{bmatrix} [\omega] & v \\ 0 & 0 \end{bmatrix} \in se(3)$$

- A point started at $\underline{p(0)}$ at time zero, travel along screw axis \mathcal{S} at unit speed for time t will end up at $\underline{\tilde{p}(t) = e^{[\mathcal{S}]t} \tilde{p}(0)}$ $\dot{\tilde{p}} = [\mathcal{S}] \tilde{p}$
- Given $\underline{\mathcal{S}}$ we can use Theorem 1 to compute $\underline{e^{[\mathcal{S}]t}} \in SE(3)$;
- Given $T \in SE(3)$, we can use Theorem 2 to find $\underline{\mathcal{S} = (\omega, v)}$ and $\underline{\theta}$ such that $e^{[\mathcal{S}]\theta} = T$.
- We call $\underline{(\mathcal{S}\theta)}$ the Exponential Coordinate of the homogeneous transformation $\underline{T \in SE(3)}$

More Space

More Space